

## Lamp Replacement

- 1 Unscrew the two wing-nuts from the wooden lamp cover and remove.
- 2 Loosen the four screws on the metal lamp cover, using a phillips screwdriver. Lift the metal lamp cover slightly and pull toward you to remove.
- 3 Unscrew the two spring-screws on the lamp cartridge and pull the cartridge toward you to remove.
- 4 Insert the new lamp cartridge securely into the TV body and tighten the two spring-screws.
- 5 Replace the metal lamp cover and tighten the four screws, using a philips screwdriver.
- 6 Replace the wooden lamp cover and tighten the two wing-nuts.




To order replacement lamp cartridges or filters call (800) 553-7278

or

visit our website at [www.mitsubishi-tv.com](http://www.mitsubishi-tv.com)

## Filter Cleaning

- 1 Unscrew the two wing-nuts from the wooden filter cover and remove.
- 2 Unscrew the spring-screw on the filter tray and pull toward you to remove.
- 3 Use a vacuum to clean the air filter pad.
- 4 Insert the filter tray back into the TV body and tighten the spring-screw.
- 5 Replace the wooden filter cover and tighten the two wing-nuts.

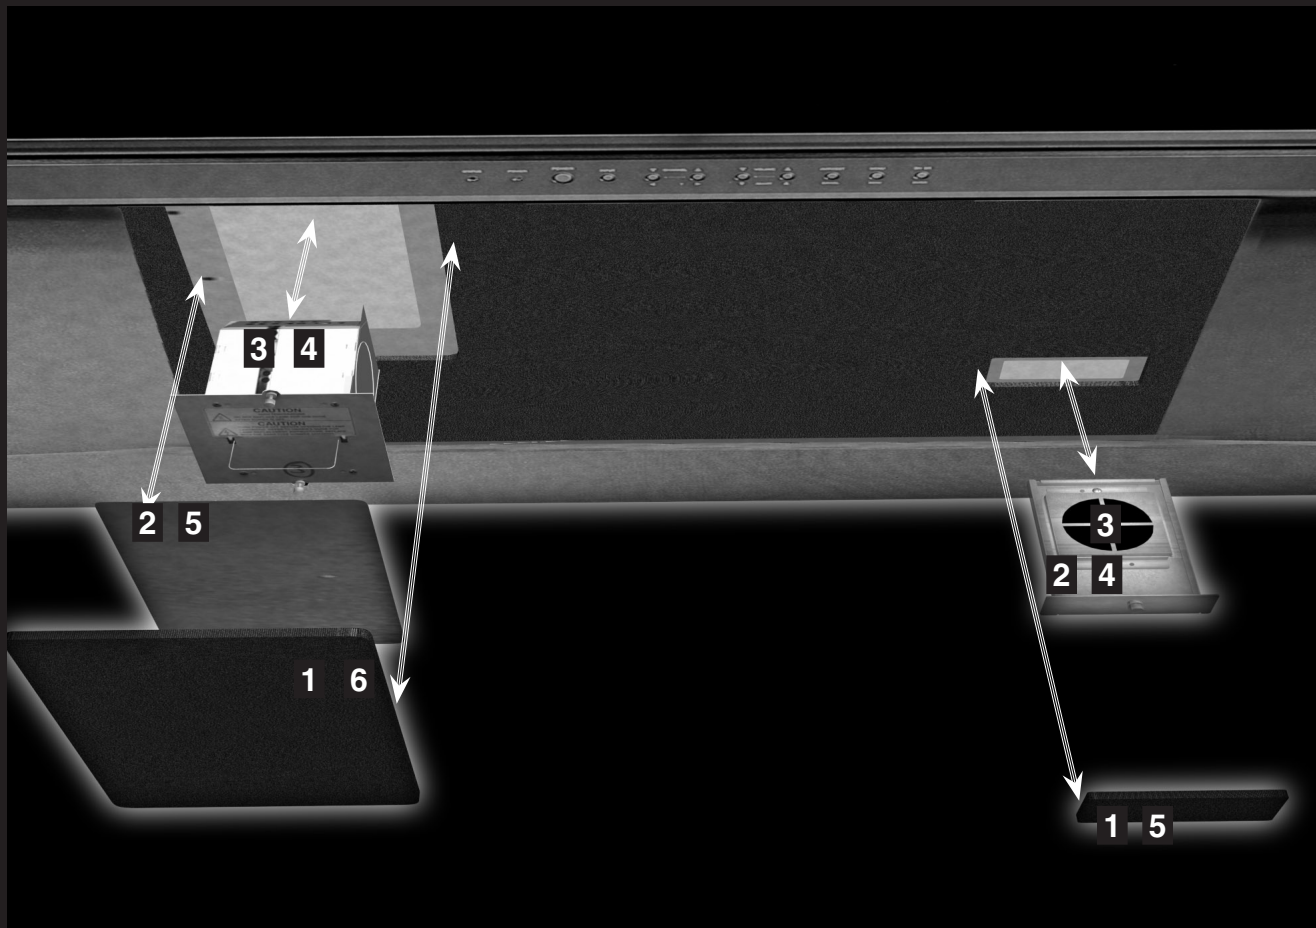

For complete instructions see *Appendix D: Lamp Replacement*, on pages 61-63 of your owner's guide, and *Appendix E: Cleaning and Service*, on pages 64-66 of your owner's guide.